



ENERG


енергия · ενεργεια



Indoor unit E*ST30C-**D
Outdoor unit PUHZ-SHW112YAA(-BS)



A⁺⁺

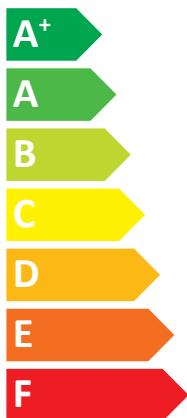

A



40 dB



60 dB



11 kW

13 kW

11 kW

2019

811/2013

BH79V003K15

Mitsubishi Electric ErP Directive Related Product Information: erp.mitsubishielectric.eu/erp

Table with columns for Outdoor unit, Indoor unit, and various performance metrics (kW, kWh, %). It is organized into sections for medium-temperature application and low-temperature application, with sub-sections for different indoor unit models like PUHZ-SW75VAA, PUHZ-SW75YAA, PUHZ-SW75VAA-SC, PUHZ-SW75YAA-SC, PUHZ-SW100VAA, PUHZ-SW100YAA, PUHZ-SW80VAA, and PUHZ-SW112VAA.

English	Deutsch	Français	Italiano	Espanol
Nederlands	Svenska	Polski	Português	Ελληνικά
suomi	Čeština	Български	Polski	Ελληνικά
Outdoor unit	Außengerät	unit extérieure	unità esterna	unidad exterior
1 built-in unit	Utløst enhed	Utløst enhed	unità esteriore	Εξωτερική μονάδα
Ulkokäyttöinen	Yhteyttömät yksiköt	Выключенные блоки	jednostka zewnętrzna	υπομονή εξωτερικών
2 built-in unit	Integriert	Unité intégrée	unità interna	Εσωτερική μονάδα
Sisäyksenrakenteinen	Integroitu	Интегрированная	unità interna	Εσωτερική μονάδα
Mediintemperatuurtoepassing	Middeltemperatuurtoepassing	Въздушно тяло	jednostka wewnętrzna	-
3 middle-temperature application	middle-temperature application	Исполнение в умеренной температуре	la aplicación a media temperatura	-
Keskilämpötilan sovellus	Keskilämpötilan sovellus	среднетемпературного приложения	a aplicación a media temperatura	-
Low-temperature application	Laagertemperatuurtoepassing	Исполнение в basse температуре	la aplicación a bassa temperatura	-
4 low-temperature application	laagertemperatuurtoepassing	Исполнение в basse температуре	a aplicación a baixa temperatura	-
Seasonal space heating energy efficiency class	de Klasse für die jahreszeitbedingte Raumheizungs-Energieeffizienz	la classe d'efficacité énergétique saisonnière, pour le chauffage des locaux	la classe di efficienza energetica stagionale del riscaldamento d'ambiente	-
5 de seizsoverdonen energie-efficiëntieklasse voor ruimteverwarming	de seizsoverdonen energie-efficiëntieklasse voor ruimteverwarming	Klassen for årsværdikategori ved uopvarmning	A classe de eficiência energética do aquecimento ambiente sazonal	-
Itäilmänykyssä käytätien energiatehokkuusluokka	Itäilmänykyssä käytätien energiatehokkuusluokka	Классы в соответствии с сезонными условиями эффективности	Klassa sezsonovъ efektivnosti energoizmenenъ organizovannaja pomieszczeni	-
Valer heating energy efficiency class	Valer heating energy efficiency class	la classe d'efficacité énergétique, pour le chauffage de l'eau	la classe di efficienza energetica del riscaldamento dell'acqua	-
6 de energie-efficiëntieklasse voor waterverwarming	de energie-efficiëntieklasse voor waterverwarming	Klassen for årsværdikategori ved uopvarmning	Klassa efektywności energoizmenenъ podgrzewania wody	-
Verderlmittkyssä energiatehokkuusluokka	Verderlmittkyssä energiatehokkuusluokka	Классы в соответствии с условиями эффективности при подогреве на вода	la potensia efectiva nominal(en condiciones climáticas medias)	-
Ratet naar opdracht onder average climate conditions	Ratet naar opdracht onder average climate conditions	la puissance thermique nominale dans les conditions climatiques moyennes	A potencia calorífica nominal(en condiciones climáticas medias)	-
de nominale vermogensgrens onder gemiddelde klimaatomstandigheden	de nominale vermogensgrens onder gemiddelde klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques moyennes	la potencia calorífica nominal(en condiciones climáticas medias)	-
7 de nominale vermogensgrens onder gemiddelde klimaatomstandigheden	de nominale vermogensgrens onder gemiddelde klimaatomstandigheden	la puissance thermique nominale dans les conditions climatiques moyennes	la potencia calorífica nominal(en condiciones climáticas medias)	-
For space heating, annual energy consumption under average climate conditions	For space heating, annual energy consumption under average climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques moyennes)	per il riscaldamento d'ambiente, il consumo annuo di energia(in condizioni climatiche medie)	-
8 voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik(onder gemiddelde klimaatomstandigheden)	for uopvarmning det årlige energiforbrug(under gennemsnitlige klimaatforhold)	Para o aquecimento ambiente, o consumo anual de energia(em condições climáticas médias)	-
Itäilmänykyssä vuotuinen energiatilaukskeuhkaisuus (lmasto-olosuhteissa)	Itäilmänykyssä vuotuinen energiatilaukskeuhkaisuus (lmasto-olosuhteissa)	za otopenie, podzimno potřeby energie na energii(при средних климатичнi условиях)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu umiarkowanego)	-
For water heating, annual electricity consumption under average climate conditions	For water heating, annual electricity consumption under average climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité(dans les conditions climatiques moyennes)	per il riscaldamento dell'acqua, il consumo annuo di energia(in condizioni climatiche medie)	-
9 voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik(onder gemiddelde klimaatomstandigheden)	for uopvarmning det årlige elforbruk(under gennemsnitlige klimaatforhold)	para o aquecimento de água, o consumo anual de electricidade(em condições climáticas médias)	-
Verderlmittkyssä vuotuinen sähkökulutus(keuhkaisuus (lmasto-olosuhteissa)	Verderlmittkyssä vuotuinen sähkökulutus(keuhkaisuus (lmasto-olosuhteissa)	za podgravanje na voda, godišnjemo potrošnje(при средних климатичнi условиях)	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu umiarkowanego)	-
Seasonal space heating energy efficiency under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	la efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	la eficiencia energética estacional de calefacción en condiciones climáticas medias)	-
10 de seizsoverdonen energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	de seizsoverdonen energie-efficiëntie voor ruimteverwarming(onder gemiddelde klimaatomstandigheden)	la efficacité énergétique saisonnière pour le chauffage des locaux(dans les conditions climatiques moyennes)	la eficiencia energética estacional de calefacción en condiciones climáticas medias)	-
Itäilmänykyssä käytätien energiatehokkuus(keuhkaisuus (lmasto-olosuhteissa)	Itäilmänykyssä käytätien energiatehokkuus(keuhkaisuus (lmasto-olosuhteissa)	Классы в соответствии с условиями эффективности при отоплении(при средних климатичнi условиях)	sezonowa efektywność energoizmenenъ organizovannaja pomieszczeni(w warunkach klimatu umiarkowanego)	-
Valer heating energy efficiency under average climate conditions	Valer heating energy efficiency under average climate conditions	la efficacité énergétique, pour le chauffage de l'eau(dans les conditions climatiques moyennes)	la eficiencia energética del calentamiento de agua(en condiciones climáticas medias)	-
11 de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming(onder gemiddelde klimaatomstandigheden)	la efficacité énergétique, pour le chauffage de l'eau(dans les conditions climatiques moyennes)	la eficiencia energética del calentamiento de agua(en condiciones climáticas medias)	-
Verderlmittkyssä energiatehokkuus(keuhkaisuus (lmasto-olosuhteissa)	Verderlmittkyssä energiatehokkuus(keuhkaisuus (lmasto-olosuhteissa)	Классы в соответствии с условиями эффективности при подогреве на вода(при средних климатичнi условиях)	efektivnoća energoizmenenъ podgrzewania wody(w warunkach klimatu umiarkowanego)	-
Sound power level L _{WA, indoor}	Sound power level L _{WA, indoor}	le niveau de puissance acoustique L _{WA, à l'intérieur}	el nivel de potencia acústica L _{WA, interior}	-
het geluidvermogenbinnen L _{WA, binnen}	het geluidvermogenbinnen L _{WA, binnen}	Уровень звуковой мощности L _{WA, I, indoors}	O nivel de potencia sonora L _{WA, interior}	-
ääniteho L _{WA, sisällä}	ääniteho L _{WA, sisällä}	нагрузка акустическоа устрои L _{WA, во внутрим. просторе}	potensiu moag akustycznej L _{WA, w pomieszczeniu}	-
Work only during off-peak hours	Work only during off-peak hours	fonctionne qd en heures creuses	funciona soltanto durante le ore notturne	-
werken uitsluitend in de daluren	werken uitsluitend in de daluren	trabaja sólo en horas de menor actividad	trabaja sólo durante las horas de baja demanda	-
kolminaan ainoastaan kuluvaltyöryhden ulkopuolella	kolminaan ainoastaan kuluvaltyöryhden ulkopuolella	работает только в часы низкой активности	Απολύτως μόνο εκτός του ωραίου αιχμής	-
14 de nominale vermogensgrens, onder koudeere klimaatomstandigheden	de nominale vermogensgrens, onder koudeere klimaatomstandigheden	la puissance nominale, dans les conditions climatiques plus froides	la potencia nominal, in condizioni climatiche più fredde	-
limittilämpötilalla, kylmissä ilmasto-olosuhteissa	limittilämpötilalla, kylmissä ilmasto-olosuhteissa	la puissance nominale, dans les conditions climatiques plus froides	la potencia nominal, in condiciones climáticas más frías	-
Ratid naar opdracht onder warme climate conditions	Ratid naar opdracht onder warme climate conditions	la puissance nominale, dans les conditions climatiques plus chaudes	A potencia calorífica nominal en condiciones climáticas más calidas	-
de nominale vermogensgrens, onder warme klimaatomstandigheden	de nominale vermogensgrens, onder warme klimaatomstandigheden	la puissance nominale, dans les conditions climatiques plus chaudes	A potencia calorífica nominal en condiciones climáticas más calidas	-
limittilämpötilalla, lämpimissä ilmasto-olosuhteissa	limittilämpötilalla, lämpimissä ilmasto-olosuhteissa	нагрузка только в теплых условиях	затемнована мощность в теплых условиях	-
For space heating, annual energy consumption under cold climate conditions	For space heating, annual energy consumption under cold climate conditions	pour le chauffage des locaux, la consommation annuelle d'énergie(dans les conditions climatiques plus froides)	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più fredde	-
16 voor ruimteverwarming, het jaarlijkse energieverbruik onder koudeere klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder koudeere klimaatomstandigheden	for uopvarmning det årlige energiforbrug(under kolde klimaatforhold)	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais frias	-
Itäilmänykyssä vuotuinen energiatilaukskeuhkaisuus	Itäilmänykyssä vuotuinen energiatilaukskeuhkaisuus	za otopenie, podzimno potřeby energie na energii(при по-студен климатичнi условиях)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu chłodszego)	-
For space heating, annual energy consumption under warm climate conditions	For space heating, annual energy consumption under warm climate conditions	pour le chauffage de l'eau, la consommation annuelle d'énergie, dans les conditions climatiques plus chaudes	per il riscaldamento d'ambiente, il consumo annuo di energia, in condizioni climatiche più calde	-
17 voor ruimteverwarming, het jaarlijkse energieverbruik onder warme klimaatomstandigheden	voor ruimteverwarming, het jaarlijkse energieverbruik onder warme klimaatomstandigheden	for uopvarmning det årlige energiforbrug(under varme klimaatforhold)	Para o aquecimento ambiente, o consumo anual de energia em condições climáticas mais quentes	-
Itäilmänykyssä vuotuinen energiatilaukskeuhkaisuus	Itäilmänykyssä vuotuinen energiatilaukskeuhkaisuus	za otopenie, podzimno potřeby energie na energii(при по-студен климатичнi условиях)	w odniesieniu do ogrzewania pomieszczeń, roczne zużycie energii(w warunkach klimatu cieplejzego)	-
For water heating, annual energy consumption under cold climate conditions	For water heating, annual energy consumption under cold climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde e più calde	-
18 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudeere klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder koudeere klimaatomstandigheden	za podgravanje na voda, godišnjemo potrošnje na elektonerogiju(при по-студен климатичнi условиях)	w odniesieniu do podgrzewania wody, roczne zużycie energii elektrycznej(w warunkach klimatu chłodszego)	-
Verderlmittkyssä vuotuinen sähkökulutus (lmasto-olosuhteissa)	Verderlmittkyssä vuotuinen sähkökulutus (lmasto-olosuhteissa)	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde e più calde	-
For water heating, annual electricity consumption under warm climate conditions	For water heating, annual electricity consumption under warm climate conditions	pour le chauffage de l'eau, la consommation annuelle d'électricité, dans les conditions climatiques plus chaudes	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più calde	-
19 voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warme klimaatomstandigheden	voor waterverwarming, het jaarlijkse elektriciteitsverbruik onder warme klimaatomstandigheden	for uopvarmning det årlige elforbrug(under varme klimaatforhold)	A eficiencia energética de agua, o consumo anual de electricidade em condições climáticas mais quentes	-
Verderlmittkyssä vuotuinen sähkökulutus (lmasto-olosuhteissa)	Verderlmittkyssä vuotuinen sähkökulutus (lmasto-olosuhteissa)	за подогревание на вода, годишното потребление на електроенергия(при по-топли климатичнi условиях)	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più calde	-
Seasonal space heating energy efficiency under cold climate conditions	Seasonal space heating energy efficiency under cold climate conditions	la efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus froides	la eficiencia energética estacional de calefacción en condiciones climáticas más frías	-
20 de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder koudeere klimaatomstandigheden	de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder koudeere klimaatomstandigheden	la efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus froides	la eficiencia energética estacional de calefacción en condiciones climáticas más frías	-
Itäilmänykyssä käytätien energiatehokkuus (lmasto-olosuhteissa)	Itäilmänykyssä käytätien energiatehokkuus (lmasto-olosuhteissa)	Классы в соответствии с условиями эффективности при отоплении(при по-студен климатичнi условиях)	sezonowa efektywność energoizmenenъ organizovannaja pomieszczeni(w warunkach klimatu chłodszego)	-
Seasonal space heating energy efficiency under warm climate conditions	Seasonal space heating energy efficiency under warm climate conditions	la efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus chaudes	la eficiencia energética estacional de calefacción en condiciones climáticas más calidas	-
21 de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder warme klimaatomstandigheden	de seizsoverdonen energie-efficiëntie voor ruimteverwarming onder warme klimaatomstandigheden	la efficacité énergétique saisonnière pour le chauffage des locaux, dans les conditions climatiques plus chaudes	la eficiencia energética estacional de calefacción en condiciones climáticas más calidas	-
Itäilmänykyssä käytätien energiatehokkuus (lmasto-olosuhteissa)	Itäilmänykyssä käytätien energiatehokkuus (lmasto-olosuhteissa)	Классы в соответствии с условиями эффективности при отоплении(при по-топли климатичнi условиях)	sezonowa efektywność energoizmenenъ organizovannaja pomieszczeni(w warunkach klimatu cieplejzego)	-
Valer heating energy efficiency under cold climate conditions	Valer heating energy efficiency under cold climate conditions	la efficacité énergétique, pour le chauffage de l'eau, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde e più calde	-
22 de energie-efficiëntie voor waterverwarming onder koudeere klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder koudeere klimaatomstandigheden	la efficacité énergétique, pour le chauffage de l'eau, dans les conditions climatiques plus froides	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più fredde e più calde	-
Verderlmittkyssä energiatehokkuus (lmasto-olosuhteissa)	Verderlmittkyssä energiatehokkuus (lmasto-olosuhteissa)	Классы в соответствии с условиями эффективности при подогреве на вода(при по-студен климатичнi условиях)	efektivnoća energoizmenenъ podgrzewania wody(w warunkach klimatu chłodszego)	-
Valer heating energy efficiency under warm climate conditions	Valer heating energy efficiency under warm climate conditions	la efficacité énergétique, pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più calde	-
23 de energie-efficiëntie voor waterverwarming onder warme klimaatomstandigheden	de energie-efficiëntie voor waterverwarming onder warme klimaatomstandigheden	la efficacité énergétique, pour le chauffage de l'eau, dans les conditions climatiques plus chaudes	per il riscaldamento dell'acqua, il consumo annuo di energia, in condizioni climatiche più calde	-
Verderlmittkyssä energiatehokkuus (lmasto-olosuhteissa)	Verderlmittkyssä energiatehokkuus (lmasto-olosuhteissa)	Классы в соответствии с условиями эффективности при подогреве на вода(при по-топли климатичнi условиях)	efektivnoća energoizmenenъ podgrzewania wody(w warunkach klimatu cieplejzego)	-
Sound power level L _{WA, outdoor}	Sound power level L _{WA, outdoor}	le niveau de puissance acoustique L _{WA, à l'extérieur}	el nivel de potencia sonora L _{WA, exterior}	-
het geluidvermogenbuiten L _{WA, buiten}	het geluidvermogenbuiten L _{WA, buiten}	Уровень звуковой мощности L _{WA, outdoors}	O nivel de potencia sonora L _{WA, exterior}	-
ääniteho L _{WA, ulkona}	ääniteho L _{WA, ulkona}	нагрузка акустическоа устрои L _{WA, во внешнем просторе}	potensiu moag akustycznej L _{WA, na zewnątrz}	-

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.7	kW	Seasonal space heating energy efficiency	η_s	135	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	11.2	kW	T _j = - 7 °C	COP _d	2.12	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	6.8	kW	T _j = + 2 °C	COP _d	3.34	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	4.79	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	6.12	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	2.12	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.50	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7457	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		120	%
Daily electricity consumption	Q _{elec}	6.580	kWh/h				
Annual electricity consumption	AEC	1448	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	169	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	12.3	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	7.5	kW	T _j = + 2 °C	COP _d	4.12	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.56	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.45	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	2.1	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	6484	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		120	%
Daily electricity consumption	Q _{elec}	6.580	kWh/h				
Annual electricity consumption	AEC	1448	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.7	kW	Seasonal space heating energy efficiency	η_s	122	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.5	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	3.26	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.50	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.28	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	9.0	kW	T _j = bivalent temperature	COP _d	1.86	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.7	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	8216	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	163	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.4	kW	T _j = - 7 °C	COP _d	4.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.1	kW	T _j = + 2 °C	COP _d	4.35	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.6	kW	T _j = + 7 °C	COP _d	5.38	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	7.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	11.7	kW	T _j = bivalent temperature	COP _d	2.62	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	3.6	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7967	kWh				

For heat pump combination heater:

Declared load profile		XL		Water heating energy efficiency	η_{wh}	93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	2.29	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	3.41	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.1	kW	T _j = +12 °C	COP _d	5.32	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	1.97	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	216	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	3.49	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	5.17	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.62	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.7	kW	Seasonal space heating energy efficiency	η_s	135	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	11.2	kW	T _j = - 7 °C	COP _d	2.12	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	6.8	kW	T _j = + 2 °C	COP _d	3.34	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	4.79	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	6.12	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	2.12	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.50	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2700	m ³ /h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7457	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	120	%
Declared load profile	XL						
Daily electricity consumption	Q _{elec}	6.580	kWh/h				
Annual electricity consumption	AEC	1448	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	169	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	12.3	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	7.5	kW	T _j = + 2 °C	COP _d	4.12	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.56	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.45	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	2.1	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	6484	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Q _{elec}	6.580	kWh/h				
Annual electricity consumption	AEC	1448	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.7	kW	Seasonal space heating energy efficiency	η_s	122	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.5	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	3.26	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.50	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.28	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	9.0	kW	T _j = bivalent temperature	COP _d	1.86	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.7	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	8216	kWh				

For heat pump combination heater:

Declared load profile		XL		Water heating energy efficiency	η_{wh}	93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	163	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.4	kW	T _j = - 7 °C	COP _d	4.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.1	kW	T _j = + 2 °C	COP _d	4.35	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.6	kW	T _j = + 7 °C	COP _d	5.38	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	7.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	11.7	kW	T _j = bivalent temperature	COP _d	2.62	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	3.6	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7967	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	157	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	2.29	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	3.41	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.1	kW	T _j = +12 °C	COP _d	5.32	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	1.97	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	216	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	3.49	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	5.17	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.62	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.7	kW	Seasonal space heating energy efficiency	η_s	137	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	11.2	kW	T _j = - 7 °C	COP _d	2.12	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	6.8	kW	T _j = + 2 °C	COP _d	3.34	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	4.79	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	6.12	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	2.12	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.50	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7457	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		120	%
Daily electricity consumption	Q _{elec}	6.580	kW/h				
Annual electricity consumption	AEC	1448	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	173	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	12.3	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	7.5	kW	T _j = + 2 °C	COP _d	4.12	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.56	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.45	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	2.1	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	6484	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		120	%
Daily electricity consumption	Q _{elec}	6.580	kWh/h				
Annual electricity consumption	AEC	1448	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.7	kW	Seasonal space heating energy efficiency	η_s	124	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.5	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	3.26	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.50	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.28	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	9.0	kW	T _j = bivalent temperature	COP _d	1.86	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.7	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	8216	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	166	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.4	kW	T _j = - 7 °C	COP _d	4.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.1	kW	T _j = + 2 °C	COP _d	4.35	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.6	kW	T _j = + 7 °C	COP _d	5.38	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	7.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	11.7	kW	T _j = bivalent temperature	COP _d	2.62	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	3.6	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7967	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	161	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	2.29	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	3.41	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.1	kW	T _j = +12 °C	COP _d	5.32	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	1.97	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	223	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	3.49	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	5.17	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.62	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	12.7	kW	Seasonal space heating energy efficiency	η_s	137	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	11.2	kW	T _j = - 7 °C	COP _d	2.12	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	6.8	kW	T _j = + 2 °C	COP _d	3.34	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	4.79	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	6.12	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	2.12	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.50	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7457	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	103	%
Daily electricity consumption	Q _{elec}	4.760	kWh/h				
Annual electricity consumption	AEC	1048	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	173	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	12.3	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	7.5	kW	T _j = + 2 °C	COP _d	4.12	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.56	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.45	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	2.1	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	6484	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	103	%
Daily electricity consumption	Q _{elec}	4.760	kW/h				
Annual electricity consumption	AEC	1048	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	10.7	kW	Seasonal space heating energy efficiency	η_s	124	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.5	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	3.26	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.50	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.28	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	9.0	kW	T _j = bivalent temperature	COP _d	1.86	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.7	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	8216	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	82	%
Daily electricity consumption	Q _{elec}	6.000	kW/h				
Annual electricity consumption	AEC	1320	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	13.9	kW	Seasonal space heating energy efficiency	η_s	166	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.4	kW	T _j = - 7 °C	COP _d	4.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.1	kW	T _j = + 2 °C	COP _d	4.35	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.6	kW	T _j = + 7 °C	COP _d	5.38	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	7.00	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	11.7	kW	T _j = bivalent temperature	COP _d	2.62	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	3.6	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	7967	kWh				

For heat pump combination heater:

Declared load profile		L		Water heating energy efficiency	η_{wh}	82	%
Daily electricity consumption	Q _{elec}	6.000	kW/h				
Annual electricity consumption	AEC	1320	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	161	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	2.29	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	3.41	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.1	kW	T _j = +12 °C	COP _d	5.32	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	11.2	kW	T _j = bivalent temperature	COP _d	1.97	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	113	%
Daily electricity consumption	Q _{elec}	4.370	kWh/h				
Annual electricity consumption	AEC	962	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW112YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	11.2	kW	Seasonal space heating energy efficiency	η_s	223	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	11.2	kW	T _j = + 2 °C	COP _d	3.49	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	7.2	kW	T _j = + 7 °C	COP _d	5.17	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.62	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	12.3	kW	T _j = bivalent temperature	COP _d	3.18	-
T _j = operation limit temperature	P _{dh}	9.0	kW	T _j = operation limit temperature	COP _d	1.40	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2700	m ³ /h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	40 / 60	dBA				
Annual energy consumption	Q _{HE}	3656	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	113	%
Declared load profile	L						
Daily electricity consumption	Q _{elec}	4.370	kWh/h				
Annual electricity consumption	AEC	962	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.3	kW	T _j = - 7 °C	COP _d	2.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.8	kW	T _j = + 2 °C	COP _d	3.23	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.9	kW	T _j = + 7 °C	COP _d	4.59	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	2.8	kW	T _j = +12 °C	COP _d	6.10	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	2.04	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.37	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	4329	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}		145	%
Daily electricity consumption	Q _{elec}	3.420	kWh/h				
Annual electricity consumption	AEC	752	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	165	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.16	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.6	kW	T _j = + 7 °C	COP _d	5.62	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = +12 °C	P _{dh}	3.1	kW	T _j = +12 °C	COP _d	7.00	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.43	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	3507	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}		145	%
Daily electricity consumption	Q _{elec}	3.420	kWh/h				
Annual electricity consumption	AEC	752	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	109	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.6	kW	T _j = - 7 °C	COP _d	2.37	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.2	kW	T _j = + 2 °C	COP _d	3.24	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	2.5	kW	T _j = + 7 °C	COP _d	4.70	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	3.0	kW	T _j = +12 °C	COP _d	6.74	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.7	kW	T _j = bivalent temperature	COP _d	1.30	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	6.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	5169	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}		123	%
Daily electricity consumption	Q _{elec}	3.990	kWh/h				
Annual electricity consumption	AEC	877	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.6	kW	T _j = - 7 °C	COP _d	2.85	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	4.14	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = + 7 °C	P _{dh}	2.6	kW	T _j = + 7 °C	COP _d	5.82	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = +12 °C	P _{dh}	3.1	kW	T _j = +12 °C	COP _d	7.81	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	5.7	kW	T _j = bivalent temperature	COP _d	1.56	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	6.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	4265	kWh				

For heat pump combination heater:

Declared load profile		L		Water heating energy efficiency	η_{wh}	123	%
Daily electricity consumption	Q _{elec}	3.990	kW/h				
Annual electricity consumption	AEC	877	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	158	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.19	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	2.9	kW	T _j = +12 °C	COP _d	5.70	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.94	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2660	m ³ /h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	2358	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	161	%
Declared load profile	L						
Daily electricity consumption	Q _{elec}	3.080	kWh/h				
Annual electricity consumption	AEC	678	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	225	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	3.13	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	4.79	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	3.1	kW	T _j = +12 °C	COP _d	7.57	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.43	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	2358	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	161	%
Daily electricity consumption	Q _{elec}	3.080	kWh/h				
Annual electricity consumption	AEC	678	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature Tj				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature Tj			
Tj = - 7 °C	Pdh	6.3	kW	Tj = - 7 °C	COPd	1.95	-
Degradation co-efficient (**)	Cdh	1.00	-				
Tj = + 2 °C	Pdh	3.8	kW	Tj = + 2 °C	COPd	3.24	-
Degradation co-efficient (**)	Cdh	0.99	-				
Tj = + 7 °C	Pdh	3.7	kW	Tj = + 7 °C	COPd	4.46	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = +12 °C	Pdh	4.3	kW	Tj = +12 °C	COPd	5.89	-
Degradation co-efficient (**)	Cdh	0.98	-				
Tj = bivalent temperature	Pdh	6.3	kW	Tj = bivalent temperature	COPd	1.95	-
Tj = operation limit temperature	Pdh	6.0	kW	Tj = operation limit temperature	COPd	1.35	-
Tj = - 15 °C (if TOL < - 20 °C)	Pdh	-	kW	Tj = - 15 °C (if TOL < - 20 °C)	COPd	-	-
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	4403	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	3449	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	η_s	101	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.8	kW	T _j = - 7 °C	COP _d	2.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.3	kW	T _j = + 2 °C	COP _d	2.93	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.0	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.3	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	5967	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.4	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.9	kW	T _j = - 7 °C	COP _d	3.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.1	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.1	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.4	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	4379	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.99	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.20	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	5.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.85	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	236	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	5.83	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.5	kW	T _j = +12 °C	COP _d	7.05	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.3	kW	T _j = - 7 °C	COP _d	1.95	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	3.8	kW	T _j = + 2 °C	COP _d	3.24	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.46	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	5.89	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.95	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.35	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	4403	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	3449	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	η_s	101	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.8	kW	T _j = - 7 °C	COP _d	2.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.3	kW	T _j = + 2 °C	COP _d	2.93	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.0	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.3	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	5967	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.4	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.9	kW	T _j = - 7 °C	COP _d	3.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.1	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.1	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.4	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	4379	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kW/h
Annual electricity consumption	AEC	-	kW/h
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.99	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.20	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	5.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.85	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	3300	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	236	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	5.83	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.5	kW	T _j = +12 °C	COP _d	7.05	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.3	kW	T _j = - 7 °C	COP _d	1.95	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	3.8	kW	T _j = + 2 °C	COP _d	3.24	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.46	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	5.89	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.95	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.35	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	4403	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	3449	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	η_s	101	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.8	kW	T _j = - 7 °C	COP _d	2.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.3	kW	T _j = + 2 °C	COP _d	2.93	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.0	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.3	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	5967	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.4	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.9	kW	T _j = - 7 °C	COP _d	3.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.1	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.1	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.4	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	4379	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.99	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.20	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	5.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.85	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	3300	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	236	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	5.83	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.5	kW	T _j = +12 °C	COP _d	7.05	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.