




ENERG

енергия · ενεργεια


Y IJA
IE IA



Indoor unit E*ST30C-**D
Outdoor unit PUHZ-SHW80YAA(-BS)

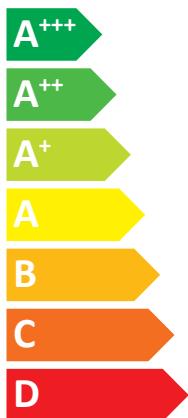

A++

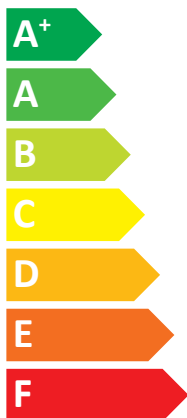

A

40 dB
59 dB



- 09 kW
- 09 kW**
- 09 kW

2019

811/2013

BH79V003K13

Mitsubishi Electric ErP Directive Related Product Information: erp.mitsubishielectric.eu/erp

		For medium-temperature application														For low-temperature application																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																				
1	2	3	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
Outdoor unit	Indoor unit	Medium-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual energy consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA} indoor	Work only during off-peak hours	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L _{WA} outdoor	Low-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual energy consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA} indoor	Work only during off-peak hours	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L _{WA} outdoor	Low-temperature application	Seasonal space heating energy efficiency class	Water heating energy efficiency class	Rated heat output under average climate conditions	For space heating, annual energy consumption under average climate conditions	For water heating, annual energy consumption under average climate conditions	Seasonal space heating energy efficiency under average climate conditions	Water heating energy efficiency under average climate conditions	Sound power level L _{WA} indoor	Work only during off-peak hours	Rated heat output under warmer climate conditions	For space heating, annual energy consumption under warmer climate conditions	For water heating, annual energy consumption under warmer climate conditions	Seasonal space heating energy efficiency under warmer climate conditions	Water heating energy efficiency under warmer climate conditions	Sound power level L _{WA} outdoor																																																																																																																																																																																																																																																																																																																																																																																																																																																																																			
PUHZ-SW75VAA-(BS)	EHST200-C2 ERST200-C2 EHST200-C(W) ERST200-C(W) EHST200-C(W) ERST200-C(W) EHSC-CC ERSC-CC EHSD-CC ERSD-CC EHST170-D ERST170-D EHST200-D ERST200-D EHSD-CC ERSD-CC	A++	A	7.1	4325	751	129	145	40	-	-	6.0	7.1	5158	2351	880	682	109	158	123	161	58	A++	A	7.2	3500	751	162	145	40	-	-	6.0	7.2	4251	1675	880	682	132	226	123	161	58																																																																																																																																																																																																																																																																																																																																																																																																																																																																																									
																																												A++	A	7.1	4325	1040	129	104	40	-	-	-	6.0	7.1	5158	2351	1288	947	107	155	83	114	58	A++	A	7.2	3500	1040	162	104	40	-	-	6.0	7.2	4251	1675	1288	947	129	219	83	114	58																																																																																																																																																																																																																																																																																																																																																																																																																																														
																																																																																							A++	A	7.1	4325	1040	129	104	40	-	-	-	6.0	7.1	5158	2351	1288	947	109	158	83	114	58	A++	A	7.2	3500	1040	166	104	40	-	-	6.0	7.2	4251	1675	1288	947	129	219	83	114	58																																																																																																																																																																																																																																																																																																																																																																																																			
																																																																																																																																		A++	A	7.1	4325	1040	132	104	40	-	-	-	6.0	7.1	5158	2351	1288	947	109	158	83	114	58	A++	A	7.2	3500	1040	166	104	40	-	-	6.0	7.2	4251	1675	1288	947	132	226	83	114	58																																																																																																																																																																																																																																																																																																																																																								
																																																																																																																																																																													A++	-	7.1	4325	-	129	-	40	-	-	-	6.0	7.1	5158	2351	-	-	107	155	-	-	-	A++	-	7.2	3500	-	162	-	40	-	-	6.0	7.2	4251	1675	-	-	129	219	-	-	58																																																																																																																																																																																																																																																																																																													
																																																																																																																																																																																																																								A++	-	7.1	4325	-	129	-	40	-	-	-	6.0	7.1	5158	2351	-	-	107	155	-	-	-	A++	-	7.2	3500	-	166	-	40	-	-	6.0	7.2	4251	1675	-	-	129	219	-	-	58																																																																																																																																																																																																																																																																		
																																																																																																																																																																																																																																																																			A++	-	7.1	4325	-	132	-	40	-	-	-	6.0	7.1	5158	2351	-	-	109	158	-	-	-	A++	-	7.2	3500	-	166	-	40	-	-	6.0	7.2	4251	1675	-	-	129	219	-	-	58																																																																																																																																																																																																																							
																																																																																																																																																																																																																																																																																																														A++	A+	7.1	4325	799	129	136	41	-	-	-	6.0	7.1	5158	2351	1030	771	107	155	105	141	58	A++	A+	7.2	3500	799	162	136	41	-	-	6.0	7.2	4251	1675	1030	771	129	219	105	141	58																																																																																																																																																																												
																																																																																																																																																																																																																																																																																																																																																									A++	A+	7.1	4325	799	132	136	41	-	-	-	6.0	7.1	5158	2351	1030	771	109	158	105	141	58	A++	A+	7.2	3500	799	166	136	41	-	-	6.0	7.2	4251	1675	1030	771	132	226	105	141	58																																																																																																																																	
																																																																																																																																																																																																																																																																																																																																																																																																				A++	A+	7.1	4325	751	129	145	41	-	-	-	6.0	7.1	5158	2351	877	678	107	155	123	161	58	A++	A+	7.2	3500	751	162	145	41	-	-	6.0	7.2	4251	1675	877	678	129	219	123	161	58																																																																																						
																																																																																																																																																																																																																																																																																																																																																																																																																																															A++	A+	7.1	4325	751	132	145	41	-	-	-	6.0	7.1	5158	2351	877	678	109	158	123	161	58	A++	A+	7.2	3500	751	166	145	41	-	-	6.0	7.2	4251	1675	877	678	132	226	123	161	58																																											
																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										A++	A	7.1	4325	1448	129	120	41	-	-	-	6.0	7.1	5158	2351	1855	1368	107	155	93	127	58	A++	A	7.2	3500	1448	162	120	41	-	-	6.0	7.2	4251	1675	1855	1368	129	219	93	127	58
A++	-	7.1	4325	-	129	-	41	-	-	-	6.0	7.1	5158	2351	-	-	107	155	-	-	-	A++	-	7.2	3500	-	162	-	41	-	-	6.0	7.2	4251	1675	-	-	129	219	-	-	58																																																																																																																																																																																																																																																																																																																																																																																																																																																																																										
																																											A++	-	7.1	4325	-	132	-	41	-	-	-	6.0	7.1	5158	2351	-	-	109	158	-	-	-	A++	-	7.2	3500	-	166	-	41	-	-	6.0	7.2	4251	1675	-	-	129	219	-	-	58																																																																																																																																																																																																																																																																																																																																																																																																																																															

English	Deutsch	Français	Italiano	Espanol
Nederlands	Svenska	Polski	Português	Ελληνικά
suomi	Čeština	Български	Polski	Ελληνικά
Outdoor unit	Außengerät	unit extérieure	unità esterna	unidad exterior
1 built-in unit	Utløst enhed	Utløst enhed	unità esteriore	Εξωτερική μονάδα
Ulkokäyttö	Vätköryt yksikö	Выпускной блок	jednostka zewnętrzna	μονάδα εξωτερική
Indoor unit	Innengerät	unit intérieure	unità interna	unidad interior
2 binnenunit	Innenhauben	Innenhauben	unità interna	Εσωτερική μονάδα
Sisäyksykäyttö	Vahitit jatkossa	Вътрешно тяло	jednostka wewnętrzna	-
Mediintemperatuurtoepassing	Middeltemperatuurtoepassing	Использование в умеренной температуре	la aplicación a media temperatura	la aplicación de media temperatura
3 keshilamprohlan sovellus	keskilämpötilan sovellys	среднетемпературно приложение	zasosowanie w umiarkowanej temperaturze	η εφαρμογή σε μέτρια θερμοκρασία
Low-temperature application	lagertemperatur-berägsning	низкотемпературный режим	la aplicación a baja temperatura	η εφαρμογή σε χαμηλή θερμοκρασία
4 matalalämpötilan sovellys	matalalämpötilan sovellys	низкотемпературный режим	zasosowanie w niskiej temperaturze	-
5 de seizoensgebonden energie-efficiëntieklassen voor ruimteverwarming	de seizoensgebonden energie-efficiëntieklassen voor ruimteverwarming	la classe de efficacité énergétique saisonnière, pour le chauffage des locaux	la classe de efficacité énergétique saisonnière de l'isoleamento d'ambiente	la clase de eficiencia energética de aislamiento ambiental estacional
6 de energie-efficiëntieklassen voor waterverwarming	de energie-efficiëntieklassen voor waterverwarming	la classe d'efficacité énergétique pour le chauffage de l'eau	la classe de efficacité énergétique de riscaldamento dell'acqua	la clase de eficiencia energética de calentamiento del agua
7 de energie-efficiëntieklassen voor waterverwarming	de energie-efficiëntieklassen voor waterverwarming	la classe d'efficacité énergétique pour le chauffage de l'eau	la classe de efficacité énergétique de chauffage de l'eau	la clase de eficiencia energética de calentamiento del agua
8 voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder gemiddelde klimaatomstandigheden)	for programming of the air conditioning (under normal climate conditions)	per il riscaldamento d'ambiente, il consumo annuo di energia (in condizioni climatiche medie)	para o aquecimento ambiente, o consumo anual de energia (em condições climáticas médias)
9 voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder gemiddelde klimaatomstandigheden)	for programming of the air conditioning (under normal climate conditions)	per il riscaldamento dell'acqua, il consumo annuo di energia (in condizioni climatiche medie)	para o aquecimento de água, o consumo anual de electricidade (em condições climáticas médias)
10 de seizoensgebonden energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	de seizoensgebonden energie-efficiëntie voor ruimteverwarming (onder gemiddelde klimaatomstandigheden)	la eficiencia energética de calefacción en condiciones climáticas medias	la efficienza energetica di riscaldamento d'ambiente (in condizioni climatiche medie)	la eficiência energética de calefacción en condiciones climáticas medias
11 de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder gemiddelde klimaatomstandigheden)	la eficiencia energética de calefacción en condiciones climáticas medias	la eficiencia energética de calentamiento de agua (en condiciones climáticas medias)	la eficiência energética de calefacción en condições climáticas médias
12 het gebruiksvormingsniveau van binnen	het gebruiksvormingsniveau van binnen	niveau de utilisation de l'appareil	il livello di polsoza sonora L _{WA} all'interno	o nível de potência sonora L _{WA} no interior
13 de normale wermtolerantie, onder koude klimaatomstandigheden	de normale wermtolerantie, onder koude klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condizioni climatiche più fredde	la potência térmica nominal em condições climáticas mais frias
14 de normale wermtolerantie, onder koude klimaatomstandigheden	de normale wermtolerantie, onder koude klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condizioni climatiche più fredde	la potência térmica nominal em condições climáticas mais frias
15 de normale wermtolerantie, onder koude klimaatomstandigheden	de normale wermtolerantie, onder koude klimaatomstandigheden	la puissance thermique nominale, dans les conditions climatiques plus froides	la potenza termica nominale, in condizioni climatiche più fredde	la potência térmica nominal em condições climáticas mais frias
16 voor ruimteverwarming, het jaarlijkse energieverbruik (onder koude klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder koude klimaatomstandigheden)	for programming of the air conditioning (under normal climate conditions)	per il riscaldamento d'ambiente, il consumo annuo di energia (in condizioni climatiche medie)	para o aquecimento ambiente, o consumo anual de energia (em condições climáticas médias)
17 voor ruimteverwarming, het jaarlijkse energieverbruik (onder koude klimaatomstandigheden)	voor ruimteverwarming, het jaarlijkse energieverbruik (onder koude klimaatomstandigheden)	for programming of the air conditioning (under normal climate conditions)	per il riscaldamento d'ambiente, il consumo annuo di energia (in condizioni climatiche medie)	para o aquecimento ambiente, o consumo anual de energia (em condições climáticas médias)
18 voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder koude klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder koude klimaatomstandigheden)	for programming of the air conditioning (under normal climate conditions)	per il riscaldamento dell'acqua, il consumo annuo di energia (in condizioni climatiche medie)	para o aquecimento de água, o consumo anual de electricidade (em condições climáticas médias)
19 voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder koude klimaatomstandigheden)	voor waterverwarming, het jaarlijkse elektriciteitsverbruik (onder koude klimaatomstandigheden)	for programming of the air conditioning (under normal climate conditions)	per il riscaldamento dell'acqua, il consumo annuo di energia (in condizioni climatiche medie)	para o aquecimento de água, o consumo anual de electricidade (em condições climáticas médias)
20 de seizoensgebonden energie-efficiëntie voor ruimteverwarming (onder koude klimaatomstandigheden)	de seizoensgebonden energie-efficiëntie voor ruimteverwarming (onder koude klimaatomstandigheden)	la eficiencia energética estacional de calefacción en condiciones climáticas más frías	la eficiencia energética estacional de calefacción en condiciones climáticas más frías	la eficiência energética estacional de calefacción en condições climáticas mais frias
21 de seizoensgebonden energie-efficiëntie voor ruimteverwarming (onder koude klimaatomstandigheden)	de seizoensgebonden energie-efficiëntie voor ruimteverwarming (onder koude klimaatomstandigheden)	la eficiencia energética estacional de calefacción en condiciones climáticas más frías	la eficiencia energética estacional de calefacción en condiciones climáticas más frías	la eficiência energética estacional de calefacción en condições climáticas mais frias
22 de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	la eficiencia energética de calefacción en condiciones climáticas más frías	la eficiencia energética de calentamiento de agua en condiciones climáticas más frías	la eficiência energética de calefacción en condições climáticas mais frias
23 de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	la eficiencia energética de calefacción en condiciones climáticas más frías	la eficiencia energética de calentamiento de agua en condiciones climáticas más frías	la eficiência energética de calefacción en condições climáticas mais frias
24 de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	de energie-efficiëntie voor waterverwarming (onder koude klimaatomstandigheden)	la eficiencia energética de calefacción en condiciones climáticas más frías	la eficiencia energética de calentamiento de agua en condiciones climáticas más frías	la eficiência energética de calefacción en condições climáticas mais frias

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.0	kW	T _j = - 7 °C	COP _d	2.13	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	4.9	kW	T _j = + 2 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.4	kW	T _j = + 7 °C	COP _d	4.66	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	5.92	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	2.13	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.55	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	5377	kWh				

For heat pump combination heater:

Declared load profile		XL		Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Q _{elec}	6.580	kW/h				
Annual electricity consumption	AEC	1448	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.5	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.2	kW	T _j = + 2 °C	COP _d	4.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.62	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.53	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.2	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	4500	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		120	%
Daily electricity consumption	Q _{elec}	6.580	kWh				
Annual electricity consumption	AEC	1448	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.4	kW	T _j = - 7 °C	COP _d	2.56	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.3	kW	T _j = + 2 °C	COP _d	3.08	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.47	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	7.6	kW	T _j = bivalent temperature	COP _d	2.05	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.5	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	7558	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	146	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.68	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.5	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	5.34	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.96	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.1	kW	T _j = bivalent temperature	COP _d	3.26	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	6128	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	2.25	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	3.42	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.0	kW	T _j = +12 °C	COP _d	5.27	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	1.98	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	213	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	3.85	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	5.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.58	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.0	kW	T _j = - 7 °C	COP _d	2.13	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	4.9	kW	T _j = + 2 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.4	kW	T _j = + 7 °C	COP _d	4.66	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	5.92	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	2.13	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.55	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2700	m ³ /h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	5377	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	120	%
Declared load profile	XL						
Daily electricity consumption	Q _{elec}	6.580	kW/h				
Annual electricity consumption	AEC	1448	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.5	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.2	kW	T _j = + 2 °C	COP _d	4.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.62	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.53	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.2	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	4500	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Q _{elec}	6.580	kWh/h				
Annual electricity consumption	AEC	1448	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	111	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.4	kW	T _j = - 7 °C	COP _d	2.56	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.3	kW	T _j = + 2 °C	COP _d	3.08	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.47	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	7.6	kW	T _j = bivalent temperature	COP _d	2.05	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.5	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	7558	kWh				

For heat pump combination heater:

Declared load profile		XL		Water heating energy efficiency	η_{wh}	93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	146	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.68	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.5	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	5.34	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.96	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.1	kW	T _j = bivalent temperature	COP _d	3.26	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	6128	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	2.25	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	3.42	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.0	kW	T _j = +12 °C	COP _d	5.27	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	1.98	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	2700	m ³ /h
Capacity control	variable						
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	127	%
Declared load profile	XL						
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	EHST30C-MED
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	213	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	3.85	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	5.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.58	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	134	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.0	kW	T _j = - 7 °C	COP _d	2.13	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	4.9	kW	T _j = + 2 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.4	kW	T _j = + 7 °C	COP _d	4.66	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	5.92	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	2.13	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.55	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	5377	kWh				

For heat pump combination heater:

Declared load profile		XL		Water heating energy efficiency	η_{wh}	120	%
Daily electricity consumption	Q _{elec}	6.580	kW/h				
Annual electricity consumption	AEC	1448	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	172	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.5	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.2	kW	T _j = + 2 °C	COP _d	4.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.62	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.53	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.2	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	4500	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		120	%
Daily electricity consumption	Q _{elec}	6.580	kWh				
Annual electricity consumption	AEC	1448	kWh				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	114	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.4	kW	T _j = - 7 °C	COP _d	2.56	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.3	kW	T _j = + 2 °C	COP _d	3.08	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.47	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	7.6	kW	T _j = bivalent temperature	COP _d	2.05	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.5	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	7558	kWh				

For heat pump combination heater:

Declared load profile		XL		Water heating energy efficiency	η_{wh}	93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	150	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.68	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.5	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	5.34	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.96	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.1	kW	T _j = bivalent temperature	COP _d	3.26	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	6128	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	93	%
Daily electricity consumption	Q _{elec}	8.430	kW/h				
Annual electricity consumption	AEC	1855	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	2.25	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	3.42	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.0	kW	T _j = +12 °C	COP _d	5.27	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	1.98	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				

For heat pump combination heater:							
Declared load profile	XL			Water heating energy efficiency	η_{wh}	127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST30C-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	221	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	3.85	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	5.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.58	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		XL		η_{wh}		127	%
Daily electricity consumption	Q _{elec}	6.220	kWh/h				
Annual electricity consumption	AEC	1368	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	134	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.0	kW	T _j = - 7 °C	COP _d	2.13	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	4.9	kW	T _j = + 2 °C	COP _d	3.31	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.4	kW	T _j = + 7 °C	COP _d	4.66	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	5.3	kW	T _j = +12 °C	COP _d	5.92	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	2.13	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.55	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.1	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	5377	kWh				

For heat pump combination heater:

Declared load profile		L		Water heating energy efficiency	η_{wh}	103	%
Daily electricity consumption	Q _{elec}	4.760	kW/h				
Annual electricity consumption	AEC	1048	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	172	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	8.5	kW	T _j = - 7 °C	COP _d	3.15	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	5.2	kW	T _j = + 2 °C	COP _d	4.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	5.0	kW	T _j = + 7 °C	COP _d	5.62	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	5.6	kW	T _j = +12 °C	COP _d	7.53	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.2	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	4500	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	103	%
Daily electricity consumption	Q _{elec}	4.760	kWh/h				
Annual electricity consumption	AEC	1048	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	114	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.4	kW	T _j = - 7 °C	COP _d	2.56	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.3	kW	T _j = + 2 °C	COP _d	3.08	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	3.5	kW	T _j = + 7 °C	COP _d	4.47	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	7.6	kW	T _j = bivalent temperature	COP _d	2.05	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.5	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	7558	kWh				

For heat pump combination heater:

Declared load profile		L		Water heating energy efficiency	η_{wh}	82	%
Daily electricity consumption	Q _{elec}	6.000	kW/h				
Annual electricity consumption	AEC	1320	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.6	kW	Seasonal space heating energy efficiency	η_s	150	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	5.8	kW	T _j = - 7 °C	COP _d	3.68	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.5	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	5.34	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	6.96	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.1	kW	T _j = bivalent temperature	COP _d	3.26	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-16	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.8	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	6128	kWh				

For heat pump combination heater:

Declared load profile		L		Water heating energy efficiency	η_{wh}	82	%
Daily electricity consumption	Q _{elec}	6.000	kW/h				
Annual electricity consumption	AEC	1320	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	159	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	2.25	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	3.42	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.0	kW	T _j = +12 °C	COP _d	5.27	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = bivalent temperature	P _{dh}	8.0	kW	T _j = bivalent temperature	COP _d	1.98	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	113	%
Daily electricity consumption	Q _{elec}	4.370	kWh/h				
Annual electricity consumption	AEC	962	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SHW80YAA(-BS)
	Indoor unit:	ERST20C-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	9.0	kW	Seasonal space heating energy efficiency	η_s	221	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	9	kW	T _j = + 2 °C	COP _d	3.85	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	5.8	kW	T _j = + 7 °C	COP _d	5.10	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	6.58	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = bivalent temperature	P _{dh}	8.5	kW	T _j = bivalent temperature	COP _d	3.15	-
T _j = operation limit temperature	P _{dh}	7.5	kW	T _j = operation limit temperature	COP _d	1.44	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-28	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2700	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	40 / 59	dBA				
Annual energy consumption	Q _{HE}	2963	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	113	%
Daily electricity consumption	Q _{elec}	4.370	kWh/h				
Annual electricity consumption	AEC	962	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.3	kW	T _j = - 7 °C	COP _d	2.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.8	kW	T _j = + 2 °C	COP _d	3.23	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.9	kW	T _j = + 7 °C	COP _d	4.59	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = +12 °C	P _{dh}	2.8	kW	T _j = +12 °C	COP _d	6.10	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	2.04	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.37	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	4329	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	145	%
Daily electricity consumption	Q _{elec}	3.420	kWh/h				
Annual electricity consumption	AEC	752	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	165	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.16	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 7 °C	P _{dh}	2.6	kW	T _j = + 7 °C	COP _d	5.62	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = +12 °C	P _{dh}	3.1	kW	T _j = +12 °C	COP _d	7.00	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.43	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	1.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	3507	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	145	%
Daily electricity consumption	Q _{elec}	3.420	kWh/h				
Annual electricity consumption	AEC	752	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	109	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.6	kW	T _j = - 7 °C	COP _d	2.37	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.2	kW	T _j = + 2 °C	COP _d	3.24	-
Degradation co-efficient (**)	C _{dh}	0.97	-				
T _j = + 7 °C	P _{dh}	2.5	kW	T _j = + 7 °C	COP _d	4.70	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = +12 °C	P _{dh}	3.0	kW	T _j = +12 °C	COP _d	6.74	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	5.7	kW	T _j = bivalent temperature	COP _d	1.30	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	6.0	kW
Thermostat-off mode	P _{TO}	0.022	kW	Type of energy input			
Standby mode	P _{SB}	0.022	kW				
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	5169	kWh				
For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		L		η_{wh}		123	%
Daily electricity consumption	Q _{elec}	3.990	kWh/h				
Annual electricity consumption	AEC	877	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.0	kW	Seasonal space heating energy efficiency	η_s	132	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.6	kW	T _j = - 7 °C	COP _d	2.85	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	4.14	-
Degradation co-efficient (**)	C _{dh}	0.96	-				
T _j = + 7 °C	P _{dh}	2.6	kW	T _j = + 7 °C	COP _d	5.82	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = +12 °C	P _{dh}	3.1	kW	T _j = +12 °C	COP _d	7.81	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	5.7	kW	T _j = bivalent temperature	COP _d	1.56	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	6.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	4265	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	123	%
Daily electricity consumption	Q _{elec}	3.990	kW/h				
Annual electricity consumption	AEC	877	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	158	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.19	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	2.9	kW	T _j = +12 °C	COP _d	5.70	-
Degradation co-efficient (**)	C _{dh}	0.95	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.94	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				
Other items				Rated air flow rate, outdoors			
Capacity control		variable				2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	2358	kWh				

For heat pump combination heater:

Declared load profile	L			Water heating energy efficiency	η_{wh}	161	%
Daily electricity consumption	Q _{elec}	3.080	kWh/h				
Annual electricity consumption	AEC	678	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75YAA-SC
	Indoor unit:	ERST20D-***D
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		yes
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	225	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	3.13	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	4.79	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	3.1	kW	T _j = +12 °C	COP _d	7.57	-
Degradation co-efficient (**)	C _{dh}	0.94	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.43	-
T _j = operation limit temperature	P _{dh}	5.6	kW	T _j = operation limit temperature	COP _d	1.30	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.022	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.022	kW				
Standby mode	P _{SB}	0.022	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items							
Capacity control	variable			Rated air flow rate, outdoors	-	2660	m ³ /h
Sound power level, indoors/outdoors	L _{WA}	41 / 58	dBA				
Annual energy consumption	Q _{HE}	2358	kWh				

For heat pump combination heater:							
Declared load profile	L			Water heating energy efficiency	η_{wh}	161	%
Daily electricity consumption	Q _{elec}	3.080	kWh/h				
Annual electricity consumption	AEC	678	kWh/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.3	kW	T _j = - 7 °C	COP _d	1.95	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	3.8	kW	T _j = + 2 °C	COP _d	3.24	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.46	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	5.89	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.95	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.35	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	4403	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P_{designh}, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(T_j).
(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	3449	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	η_s	101	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.8	kW	T _j = - 7 °C	COP _d	2.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.3	kW	T _j = + 2 °C	COP _d	2.93	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.0	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.3	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	5967	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.4	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.9	kW	T _j = - 7 °C	COP _d	3.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.1	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.1	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.4	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	4379	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.99	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.20	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	5.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.85	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	3300	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	236	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	5.83	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.5	kW	T _j = +12 °C	COP _d	7.05	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.3	kW	T _j = - 7 °C	COP _d	1.95	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	3.8	kW	T _j = + 2 °C	COP _d	3.24	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.46	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	5.89	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.95	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.35	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	4403	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	3449	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	η_s	101	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.8	kW	T _j = - 7 °C	COP _d	2.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.3	kW	T _j = + 2 °C	COP _d	2.93	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.0	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.3	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	3300	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	5967	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.4	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.9	kW	T _j = - 7 °C	COP _d	3.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.1	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.1	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.4	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	4379	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.99	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.20	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	5.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.85	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSC-MEC
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		no
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	236	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	5.83	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.5	kW	T _j = +12 °C	COP _d	7.05	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating P_{designh}, and the rated heat output of a supplementary heater P_{sup} is equal to the supplementary capacity for heating sup(T_j).

(**) If C_{dh} is not determined by measurement then the default degradation coefficient is C_{dh} = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	129	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.3	kW	T _j = - 7 °C	COP _d	1.95	-
Degradation co-efficient (**)	C _{dh}	1.00	-				
T _j = + 2 °C	P _{dh}	3.8	kW	T _j = + 2 °C	COP _d	3.24	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.46	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = +12 °C	P _{dh}	4.3	kW	T _j = +12 °C	COP _d	5.89	-
Degradation co-efficient (**)	C _{dh}	0.98	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.95	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.35	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	4403	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details
MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD. Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).
(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		average climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	167	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	6.4	kW	T _j = - 7 °C	COP _d	2.98	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	3.9	kW	T _j = + 2 °C	COP _d	4.04	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.9	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	3449	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kW/h
Annual electricity consumption	AEC	-	kW/h
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.3	kW	Seasonal space heating energy efficiency	η_s	101	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.8	kW	T _j = - 7 °C	COP _d	2.22	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.3	kW	T _j = + 2 °C	COP _d	2.93	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.7	kW	T _j = + 7 °C	COP _d	4.32	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.4	kW	T _j = +12 °C	COP _d	6.23	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.0	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.3	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	3300	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	5967	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		colder climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	6.4	kW	Seasonal space heating energy efficiency	η_s	141	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	3.9	kW	T _j = - 7 °C	COP _d	3.55	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 2 °C	P _{dh}	2.4	kW	T _j = + 2 °C	COP _d	3.91	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	3.9	kW	T _j = + 7 °C	COP _d	5.54	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.6	kW	T _j = +12 °C	COP _d	7.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.1	kW	T _j = bivalent temperature	COP _d	1.28	-
T _j = operation limit temperature	P _{dh}	6.1	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-20	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	6.4	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items			
Capacity control		variable	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)
Annual energy consumption	Q _{HE}	4379	kWh
Rated air flow rate, outdoors		3300	m ³ /h

For heat pump combination heater:			
Declared load profile		-	
Daily electricity consumption	Q _{elec}	-	kWh
Annual electricity consumption	AEC	-	kWh
Water heating energy efficiency	η_{wh}	-	%

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		medium-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.1	kW	Seasonal space heating energy efficiency	η_s	155	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.1	kW	T _j = + 2 °C	COP _d	1.99	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.6	kW	T _j = + 7 °C	COP _d	3.20	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.2	kW	T _j = +12 °C	COP _d	5.50	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.3	kW	T _j = bivalent temperature	COP _d	1.85	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors	-	3300	m ³ /h
Capacity control		variable					
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency	η_{wh}	-	%
Declared load profile		-					
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.

Model(s):	Outdoor unit:	PUHZ-SW75VHA(-BS)
	Indoor unit:	ERSD-***C
Air-to-water heat pump:		yes
Water-to-water heat pump:		no
Brine-to-water heat pump:		no
Low-temperature heat pump:		no
Equipped with a supplementary heater:		yes
Heat pump combination heater:		no
Parameters for		low-temperature application.
Parameters for		warmer climate conditions.

Item	Symbol	Value	Unit	Item	Symbol	Value	Unit
Rated heat output (*)	Prated	7.2	kW	Seasonal space heating energy efficiency	η_s	236	%
Declared capacity for heating for part load at indoor temperature 20 °C and outdoor temperature T _j				Declared coefficient of performance or primary energy ratio for part load at indoor temperature 20 °C and outdoor temperature T _j			
T _j = - 7 °C	P _{dh}	-	kW	T _j = - 7 °C	COP _d	-	-
Degradation co-efficient (**)	C _{dh}	-	-				
T _j = + 2 °C	P _{dh}	7.2	kW	T _j = + 2 °C	COP _d	2.87	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = + 7 °C	P _{dh}	4.7	kW	T _j = + 7 °C	COP _d	5.83	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = +12 °C	P _{dh}	4.5	kW	T _j = +12 °C	COP _d	7.05	-
Degradation co-efficient (**)	C _{dh}	0.99	-				
T _j = bivalent temperature	P _{dh}	6.4	kW	T _j = bivalent temperature	COP _d	2.98	-
T _j = operation limit temperature	P _{dh}	6.0	kW	T _j = operation limit temperature	COP _d	1.28	-
T _j = - 15 °C (if TOL < - 20 °C)	P _{dh}	-	kW	T _j = - 15 °C (if TOL < - 20 °C)	COP _d	-	-
Bivalent temperature	T _{biv}	-7	°C	Operation limit temperature	TOL	-20	°C
				Heating water operating limit temperature	WTOL	60	°C
Power consumption in modes other than active mode				Supplementary heater			
Off mode	P _{OFF}	0.015	kW	Rated heat output (*)	P _{sup}	0.0	kW
Thermostat-off mode	P _{TO}	0.015	kW				
Standby mode	P _{SB}	0.015	kW	Type of energy input			
Crankcase heater mode	P _{CK}	0.000	kW				

Other items				Rated air flow rate, outdoors			
Capacity control		variable		-	3300	m ³ /h	
Sound power level, indoors/outdoors	L _{WA}	40 / 68	dB(A)				
Annual energy consumption	Q _{HE}	2389	kWh				

For heat pump combination heater:				Water heating energy efficiency			
Declared load profile		-		η_{wh}	-	%	
Daily electricity consumption	Q _{elec}	-	kW/h				
Annual electricity consumption	AEC	-	kW/h				

Contact details

MITSUBISHI ELECTRIC AIR CODITIONING SYSTEM EUROPE LTD Nettlehill Road, Houston Industrial Estate, Livingston, EH54 5EQ, Scotland, U.K.

(*) For heat pump space heaters and heat pump combination heaters, the rated heat output Prated is equal to the design load for heating Pdesignh, and the rated heat output of a supplementary heater Psup is equal to the supplementary capacity for heating sup(Tj).

(**) If Cdh is not determined by measurement then the default degradation coefficient is Cdh = 0,9.